
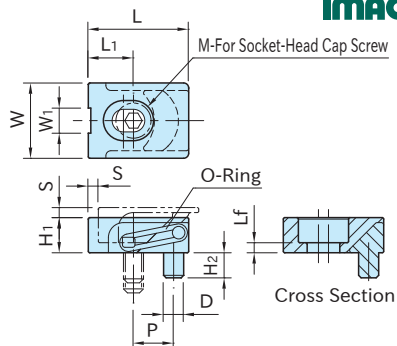


CP134

COMPACT SIDE CLAMPS




| Body | O-Ring |
|--|------------------|
| SCM440 steel Black oxide finished HRC33-39 | Fluoro rubber |

| Part Number | S | W | W ₁ | H ₁ | L ₁ | P | D | H ₂ | M | L _f | L |
|--------------------|-----|----|----------------|----------------|----------------|----|---|----------------|----|----------------|----|
| CP134-04007 | 2 | 15 | 5 | 7 | 9 | 8 | 4 | 5 | M4 | 2 | 20 |
| CP134-05009 | 2.5 | 19 | 7 | 9 | 11 | 10 | 5 | 6 | M5 | 3 | 25 |


| Part Number | Clamping Force (kN) | Allowable Screw Torque (N·m) | Weight (g) | Proper NOK's O-ring |
|--------------------|---------------------|------------------------------|------------|---------------------|
| CP134-04007 | 2.5 | 2.7 | 13 | CO 3216H0 (SS6.5) |
| CP134-05009 | 3.5 | 5.4 | 26 | CO 0505P0 (S8) |

How To Use

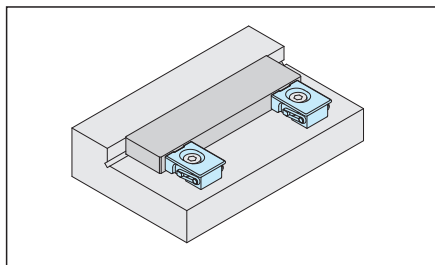


Feature

(Jaw moves obliquely downward)



- ① Horizontal pressure against workpiece
- ② Vertical pressure preventing workpiece lift

Mounting-Hole Dimension



Drill a tapped hole and a locking-pin hole as specified below.

| Part Number | M ₁ | d _(+0.3/0) | L _{f1} | P ₁ |
|--------------------|----------------|-----------------------|-----------------|----------------|
| CP134-04007 | M4 | 4 | 6 | 8 |
| CP134-05009 | M5 | 5 | 7 | 10 |